




Product Details

1.FEATURES



- safety transformer/Short-circuit-pooof
- vacuum filled casting
- split bobbin design winding
- high capacity from 0.5 to 3.0 VA
- secondary voltage 6 V to 24 V or 2 x 6 V to 2 x 24 V respectively
- temperature class ta 50°C/B and ta 70°C/B
- dielectric strength 4500Vrms
- finished product full inspection

2.SPECIFICATIONS

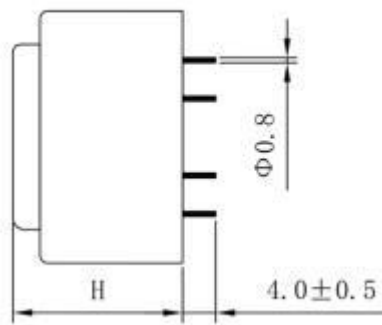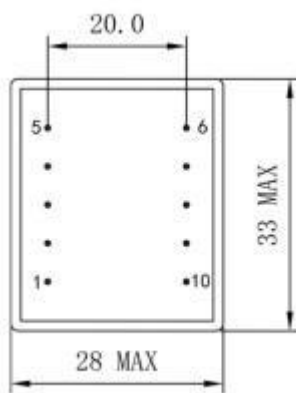

Framesize/Core height	Output ta 70°C/B	Output ta40°C/B	Size(H)	Weight	Packaging unit (pieces)
AS3005- / 5mm	0.5 VA	0.6 VA	15.8 mm(MAX)	43 g	200
AS3010- .../ 10.5mm	1.0 VA	1.5 VA	22.1 mm(MAX)	60 g	200
AS3012- ... / 12.5mm	1.5 VA	1.8 VA	24.3 mm(MAX)	70 g	200
AS3015- ... / 15.5mm	2.0 VA	2.3 VA	27.3 mm(MAX)	85 g	160
AS3018- ... / 18mm	2.3 VA	2.8 VA	29.5 mm(MAX)	100 g	160
AS3023- ... / 23mm	2.8 VA	3.0 VA	34.5 mm(MAX)	115 g	120

3.PURPOSE

The EI30 series are used in a multitude of applications. All the transformers of the EI30 series are manufactured on the most modern production equipment. Fully automated manufacturing in large volumes provides the most favorable price.