


RECOMMENDED PCB LAYOUT  
 TOLERANCE: ±0.05



NOTES:

- MATERIAL: 1. See Table A.
- FINISH: 2.1 CONTACT: 3μ"Min. PLATED ON CONTACT AREA  
 G/F PLATING ON SOLDER TAIL AREA  
 2.2 SHELL: 50~80μ" NICKEL UNDERPLATING OVER ALL  
 80~120μ" MATTER TIN PLATING ALL  
 50~80μ" NICKEL UNDERPLATING OVER ALL
- SPECIFICATION: 3.1 CURRENT RATING: 1.0A MAX  
 3.2 VOLTAGE: 100 VAC  
 3.3 TEMPERATURE RANGE: -30 °C ~ 85 °C  
 3.4 CONTACT RESISTANCE: 30 MILLIONHM MAX  
 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 200 VAC r.m.s  
 3.6 INSULATION RESISTANCE: 100 MEGOHMS MIN.

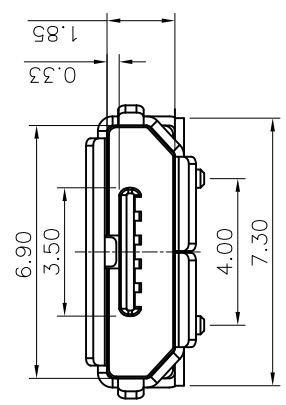


TABLE A:

3	外壳	YTS-1008-M05S5	1PCS	STAINLESS STEEL MATTE	TIN/Ni Plated
2	端子	YTA-1007-G3P0	5PCS	COPPER ALLOY	Au/Ni Plated
1	塑胶主体	MUSB-1008-05L7BK2	1PCS	LCP UL94V-0	BLACK
项目	组成部件	部件料号	用量	材质/处理	备注
TOLERANCE					
X. ±0.25	X.° ± 3°	NAME (INTENDED USE)			
.X ±0.20	.X° ± 2°	CUSTOMER			
.XX ±0.15	.XX° ± 1°	PART NO.			
UNITS	mm	AUSB-1008-05S2			
MATERILA		APPD:weixinTan 2012.05.10			
FINISH		CHED:weixinTan 2012.05.10			
		DRAW: Guojiangang 2012.05.10			

**Wellco T&C Co., Ltd.**  
 TITLE: MICRO USB 5P 4脚平贴-成品  
 DRAWG NO. 020-1008-MICRO-05S2  
 SCALE SHEET REV. NONE 1/1 A