


## ◆ SPECIFICATION

DESCRIPTION

UL2896 - 20N × 100mm \* 1.0p \* (4/4 , 8/8) \* (0,1\*0,65) \* P7

### ► CABLE TYPE (PATTERN : 7 )

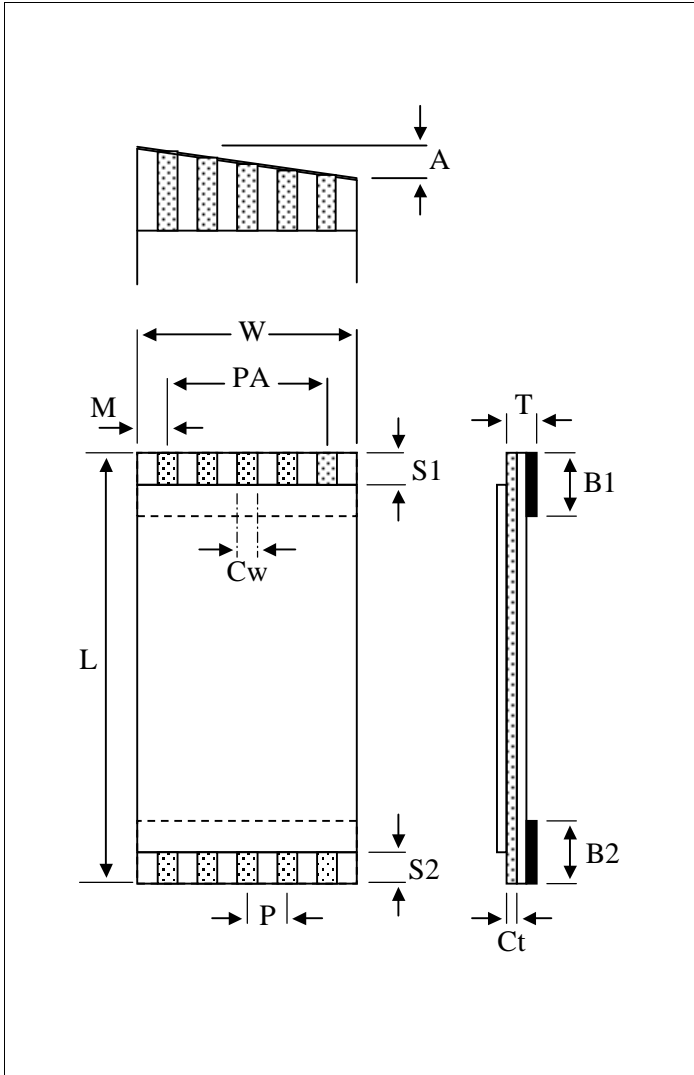

### ► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.0	± 0.10
NO. OF CONDUCTOR	N	20	-
CABLE LENGTH	L	100	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	21,00	± 0.15
SPAN	PA	19,00	± 0.15
MARGIN	M	1.0	± 0.15
CONDUCTOR THICK	Ct	0,10	± 0.01
CONDUCTOR WIDTH	Cw	0,65	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1µm ↑	

### ◎ REMARK